



贴片保险丝SMD

自恢复保险丝PPTC

片状保险丝Chip Fuse

温度保险丝Thermal Cutoff

三端保险丝Self Control Protector


成为全球卓越的电路安全保护解决方案提供商

Global Outstanding Circuit Protection Solutions Provider

贴片保险丝 SMD

▶ 10NF Series


Current Rating: 30A~100A
Reated Voltage: 32V/75V/100V/115V DC 250V AC

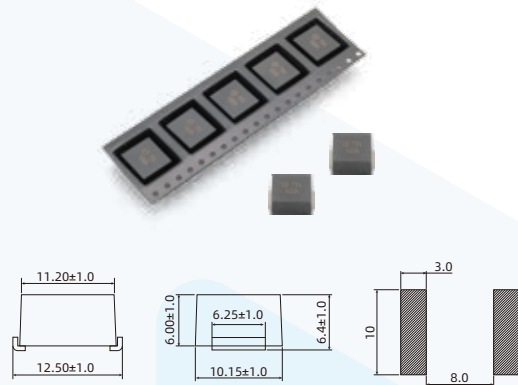

Unit:mm

▶ 4CT Series



Current Rating: 1A-3.15A
Reated Voltage: 500V DC /350V DC/350V AC
Current Rating: 4A-5A
Reated Voltage: 450V DC/350V AC/125V DC

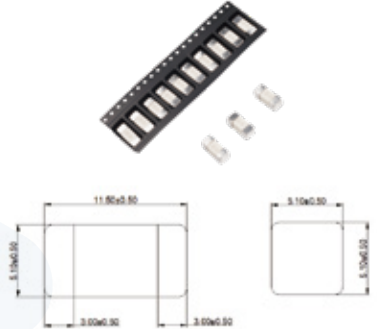

Unit:mm

▶ 3NF Series



Current Rating: 5A~60A
Reated Voltage: 32V/75V/125V DC 250V AC

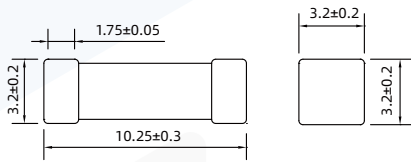

Unit:mm

▶ 3NT Series



Current Rating: 200mA~10A
Reated Voltage: 125V AC/DC 250V AC

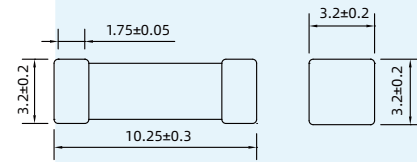

Unit:mm

▶ 25T Series



Current Rating: 200mA-5A
Reated Voltage: 125V/250V

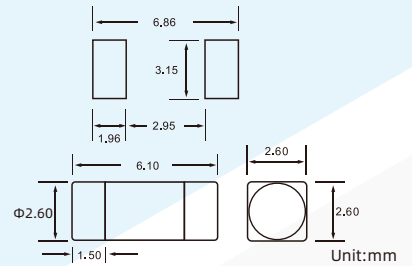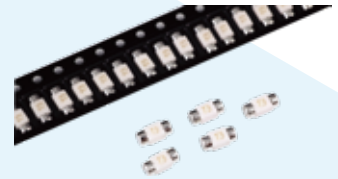

Unit:mm

▶ 24F Series


Current Rating: 50mA-40A
Reated Voltage: 65V/125V/250V DC
125V/250V AC

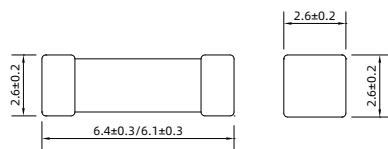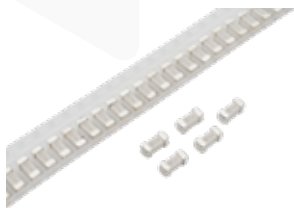

Unit:mm

▶ 12F/12T Series


Current Rating: 12F: 100mA~7A 12T: 500mA~7A
Reated Voltage: 24V/32V/63V

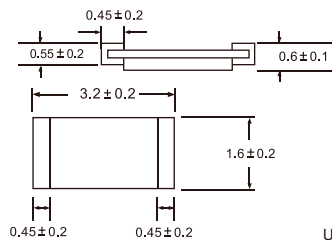

Unit:mm

▶ 06F/06T Series

Current Rating: 06F: 200mA~5A 06T: 1A~5A
Reated Voltage: 32V/63V

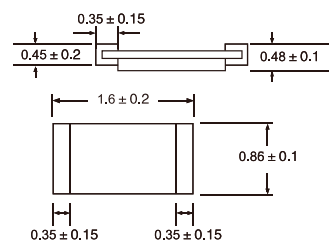



Unit:mm



自恢复保险丝 PPTC

▶ PSL Series



Low Voltage R-Line Series
Operation Current: 0.30A~14.00A
Maximum Voltage: 16V DC

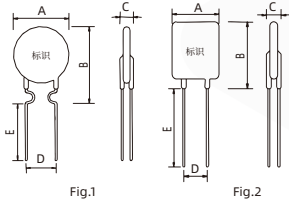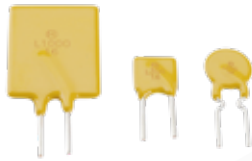

Unit:mm

▶ PSM Series


Low Voltage R-Line Series
Operation Current: 0.50A~9.00A
Maximum Voltage: 30V DC

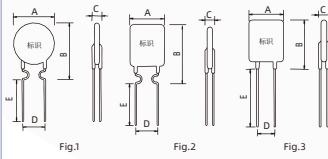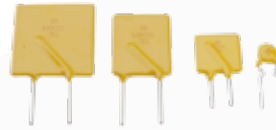

Unit:mm

▶ PSN Series



Low Voltage R-Line Series
Operation Current: 0.05A~5.00A
Maximum Voltage: 60V/70V DC

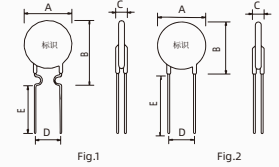

Unit:mm

▶ PSO Series



Low Voltage R-Line Series
Operation Current: 0.06A~3.00A
Maximum Voltage: 130V AC/DC

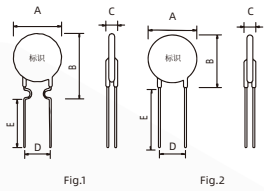

Unit:mm

▶ PSP Series


High Voltage R-Line Series
Operation Current: 0.02A~2.00A
Maximum Voltage: 250V AC/DC

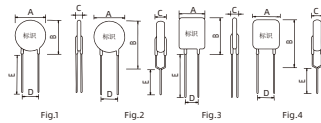

Unit:mm

▶ HSMD2920 Series


Surface Mount PPTC
Operation Current: 0.30A~6.00A
Maximum Voltage: 6~60V DC

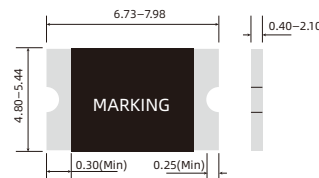

Unit:mm

▶ HSMD1812 Series


Surface Mount PPTC
Operation Current: 0.10A~4.00A
Maximum Voltage: 6~60V DC

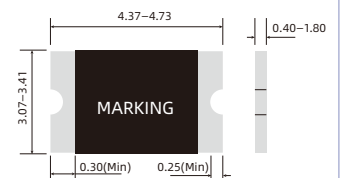

Unit:mm

▶ HSMD1210 Series


Surface Mount PPTC
Operation Current: 0.05A~2.60A
Maximum Voltage: 6~60V DC

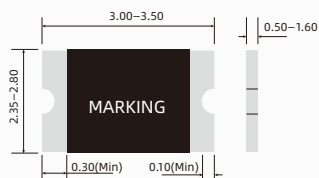

Unit:mm

▶ HSMD1206 Series


Surface Mount PPTC
Operation Current: 0.05A~3.00A
Maximum Voltage: 6~60V DC

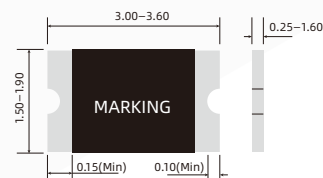

Unit:mm

▶ HSMD0805 Series


Surface Mount PPTC
Operation Current: 0.05A~1.50A
Maximum Voltage: 6~33V DC

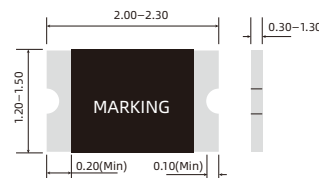

Unit:mm

▶ HSMD0603 Series

Surface Mount PPTC
Operation Current: 0.01A~1.00A
Maximum Voltage: 6~60V DC

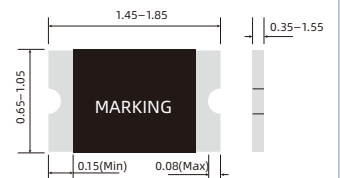

Unit:mm




温度保险丝 Thermal Cutoff

TH、RH、KSD

▶ TH Series

THERMAL CUTOFF

Current Rating: 10A
 Reated Voltage: 250V AC
 Rated Functioning Temp. Tf: 72 ~ 257°C

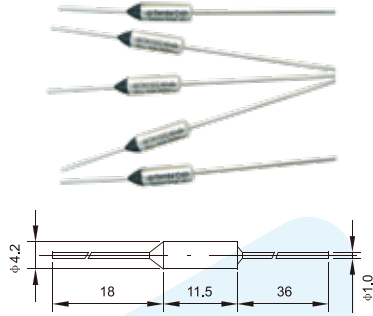


Unit:mm

▶ RH Series

THERMAL CUTOFF

Current Rating: 5A, 10A, 15A, 20A
 Reated Voltage: 250V AC
 Rated Functioning Temp. Tf: 115 ~ 150°C


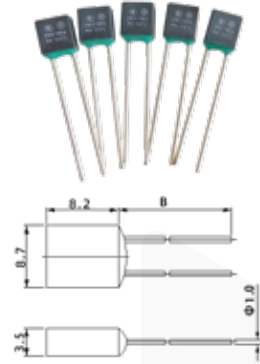


Unit:mm

▶ RH01 Series

THERMAL CUTOFF

Current Rating: 1A, 2A, 3A
 Reated Voltage: 250V
 Rated Functioning Temp. Tf: 75 ~ 155°C

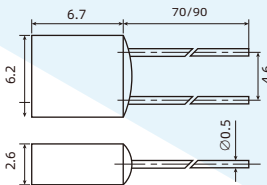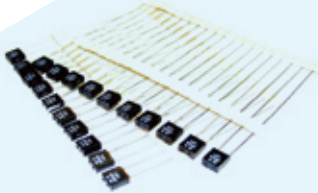


Unit:mm

▶ RH03 Series

THERMAL CUTOFF

Current Rating: 1A, 2A, 3A
 Reated Voltage: 250V
 Rated Functioning Temp. Tf: 75~150°C




Unit:mm

▶ KSD-9700 Series

THERMOSTAT

Current Rating: 5A
 Reated Voltage: 250V AC
 Rated Functioning Temp. Tf: 60±5~150±5°C

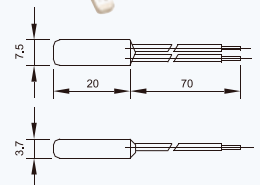


Unit:mm

▶ KSD-F01 Series

THERMOSTAT

Current Rating: 5A, 10A Reated Voltage: 250V
 Rated Functioning Temp. Tf: 40±5 ~ 185±10°C

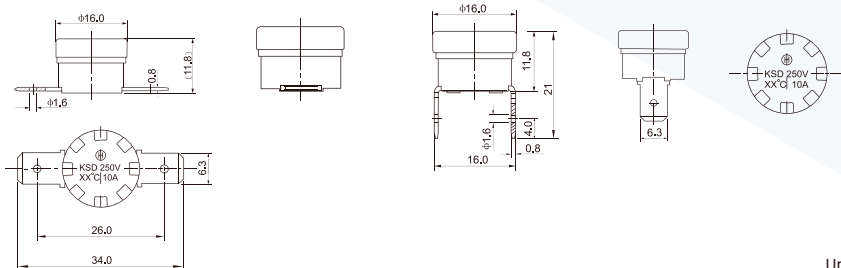


Unit:mm

▶ CK-1 Series

THERMOSTAT

Current Rating: 5A, 10A
 Reated Voltage: 250V AC
 Rated Functioning Temp. Tf: 60±5~150±5°C

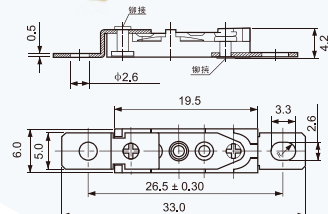

Unit:mm



三端保险丝 Self Control Protector

▶ **WSFB Series**

Rated: 15A-22A
Vmax: 36V DC-62V DC

Unit:mm

▶ **WSFC Series**

Rated: 12A-30A
Vmax: 36V DC-62V DC

Unit:mm

▶ **WSFD Series**

Rated: 30A-45A
Vmax: 62V DC-80V DC

Unit:mm



片状保险丝 Chip Fuse

▶ **Small Chip Fuse Series**

Chip Fuse Series
Operation Current: 1A-35A
Maximum Voltage: 32/48/58V DC
Temperature Range: -40°C to 125°C

Unit:mm

▶ **Medium Chip Fuse Series**

Chip Fuse Series
Operation Current: 1A-40A
Maximum Voltage: 32/58V DC
Temperature Range: -40°C to 125°C

Unit:mm


▶ **Large Chip Fuse Series**

Chip Fuse Series
Operation Current: 20A-100A
Maximum Voltage: 32/63/80V DC
Temperature Range: -40°C to 125°C


Unit:mm

▶ Chip Fuse Series


Operation Current: 30A-200A
Maximum Voltage: 70V DC
Temperature Range: -40°C to 125°C

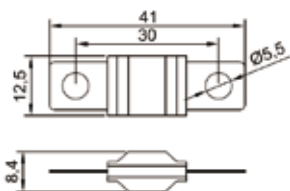

Operation Current: 25A-200A
Maximum Voltage: 58V DC
Temperature Range: -40°C to 125°C

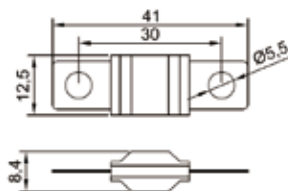

Operation Current: 40A-500A
Maximum Voltage: 70V DC
Temperature Range: -40°C to 125°C

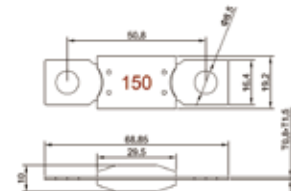

Unit:mm



HOLLY 好利®

www.hollyfuse.com



FM 665095



ISO14001 CERTIFIED



705016



ISO45001 CERTIFIED



扫一扫获取更多资讯

好利来(厦门)电路保护科技有限公司 Hollyland (Xiamen) Technology Corporation Limited

好利来(中国)电子科技股份有限公司 (002729) 全资子公司

829, Fangshan East 2nd Road, Xiang'an, Xiamen, China. P.C.361101
Tel: (86) 592-577 2288 Fax: (86) 592- 577 3979
E-mail: sdxm@hollyfuse.com

中国福建省厦门市翔安区舩山东二路829号 邮编:361101
电话: (86) 592-577 2288 传真: (86) 592- 577 3979
邮箱: sdxm@hollyfuse.com

Shenzhen Office

Room 416, C2 Building, Nanshan Zhiyuan,
1001 Xueyuan Avenue, Nanshan District, Shenzhen

深圳办事处

深圳市南山区桃源街道长源社区学苑大道1001号
南山智园C2栋4层416
邮箱: sdsz@hollyfuse.com

Suzhou Office

Room 1307, Building 1, Lejihui Business Square,
Hi-Tech Zone, Suzhou

苏州办事处

苏州市高新区乐嘉汇商务广场1幢1307室
电话:0512-68430275 0512-68430297